


▶ AUGER SEAL TYPE A107

▼ WE SEAL PUMPS!

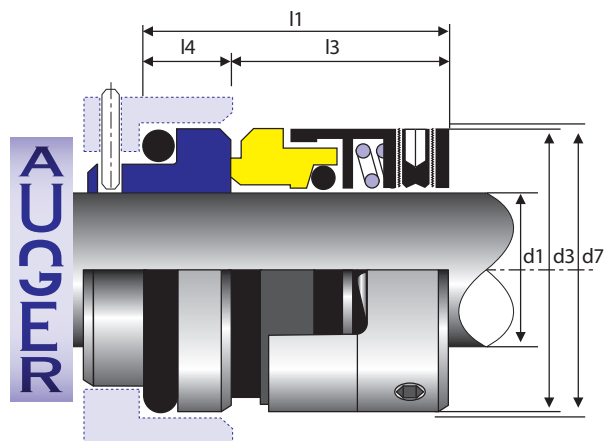

Dimensions in millimeters

Diameter d1	d3	d7	l1	l3	l4
14	25	25	35,00	25,00	10,00
16	27	27	35,00	25,00	10,00
18	33	33	37,50	26,00	11,50
20	35	35	37,50	26,00	11,50
22	37	37	37,50	26,00	11,50
24	39	39	40,00	28,50	11,50
25	40	40	40,00	28,50	11,50
28	43	43	42,50	31,00	11,50
30	45	45	42,50	31,00	11,50
32	47	48	42,50	31,00	11,50
33	48	48	42,50	31,00	11,50
35	50	50	42,50	31,00	11,50
38	55	56	45,00	31,00	14,00
40	57	58	45,00	31,00	14,00
43	60	61	45,00	31,00	14,00
45	62	63	45,00	31,00	14,00
48	65	66	45,00	31,00	14,00
50	67	70	47,50	32,50	15,00
53	70	73	47,50	32,50	15,00
55	72	75	47,50	32,50	15,00
58	79	78	52,50	37,50	15,00
60	81	80	52,50	37,50	15,00
63	84	83	52,50	37,50	15,00
65	86	85	52,50	37,50	15,00
68	89	90	52,50	37,50	18,00
70	91	92	60,00	42,00	18,00
75	99	97	60,00	42,00	18,00
80	104	105	60,00	42,00	18,20
85	109	110	60,00	42,00	18,20
90	114	115	65,00	47,00	18,20
95	119	120	65,00	48,00	17,20
100	124	125	65,00	48,00	17,20

SPECIFICATIONS

- Pmax: 16 bar
- T°C: -50 ~ 200 °C
- Unbalanced seal according to EN 12756
- Double directional

APPLICATIONS

- DIN-pumps
- Chemical pumps
- Mixers

MATERIALS

- Faces: Q, Q1, TC, st/st
- Metal parts: st/st 304 & 316
- O-rings: Viton, EPDM, a.o.

REMARKS

- Dimensions are standard with AG9 seat
- Special executions on request

AUGER_{N.V.}

Kemelbeekstraat 30 - 2460 TIELEN - Belgium

T +32 (0)14 86 03 55 E info@auger.be W www.auger.be