


▶ AUGER SEAL TYPE AN

▼ WE SEAL PUMPS!

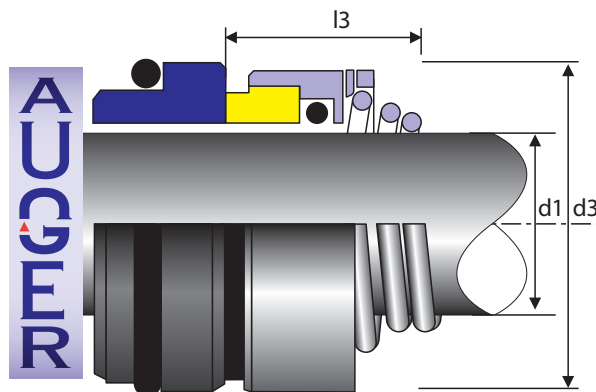

Dimensions in millimeters

Diameter d1	d3	l3
14	24,00	16,50
16	26,00	16,50
18	31,00	18,00
20	34,00	19,00
22	36,00	20,50
24	38,00	22,00
25	39,00	23,50
28	42,00	24,50
30	44,00	24,50
32	46,00	28,00
33	47,00	
35	49,00	28,00
38	54,00	31,00
40	56,00	34,00
42	59,00	35,00
43	59,00	
45	61,00	36,50
48	64,00	42,00
50	66,00	43,00
53	69,00	
55	71,00	47,00
58	78,00	50,00
60	79,00	51,00
65	85,00	52,00
68	88,00	52,70
70	90,00	54,00
75	98,00	54,00
80	103,00	58,00

SPECIFICATIONS

- Pmax: 10 bar
- T°C: -20 ~ 180 °C
- Single directional

APPLICATIONS

- Submersible pumps
- Water pumps
- Chemical pumps
- DIN pumps

MATERIALS

- Sic/Sic , Q1/Q2
- Tc/Tc
- Carb
- Metal parts: st/st 304 & 316
- O-rings: Viton, EPDM en NBR

REMARKS

- Other dimensions on request
- Seats standard with AG9, AG4, AG6, AG60 a.o.

AUGER_{N.V.}

Kemelbeekstraat 30 - 2460 TIELEN - Belgium

T +32 (0)14 86 03 55 E info@auger.be W www.auger.be