


▶ AUGER SEAL TYPE ARB INCH

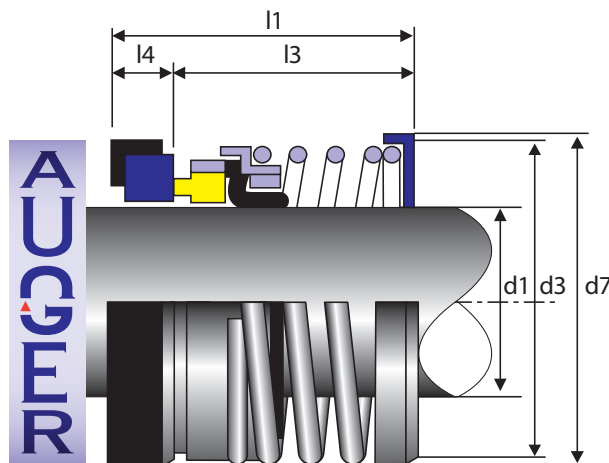

▼ WE SEAL PUMPS!

Dimensions in millimeters

Size d1 (inch)	d1	d3	d7	l3	l4	l1
3/4"	19,50	30,50	35,00	22,20	10,30	32,50
7/8"	22,23	34,00	38,10	24,00	10,30	34,30
1"	25,40	40,00	41,30	25,40	11,00	36,40
1 1/8"	28,58	44,50	44,50	27,00	11,00	38,00
1 1/4"	31,75	46,50	47,70	27,00	11,00	38,00
1 3/8"	34,93	51,50	50,80	28,50	11,00	39,50
1 1/2"	38,10	54,00	54,00	28,50	11,00	39,50
1 5/8"	41,28	58,00	60,30	35,00	12,70	47,70
1 3/4"	44,45	61,50	63,50	35,00	12,70	47,70
1 7/8"	47,63	65,50	66,70	38,00	12,70	50,70
2"	50,80	70,50	69,90	38,00	12,70	50,70
2 1/8"	53,98	75,00	76,20	43,00	14,30	57,30
2 1/4"	57,15	79,00	79,40	43,00	14,30	57,30
2 3/8"	60,33	82,00	82,60	46,00	14,30	60,30
2 1/2"	63,50	86,00	85,70	46,00	14,30	60,30
2 5/8"	66,68	91,50	85,70	49,00	16,00	65,00
2 3/4"	69,85	91,50	88,90	49,00	16,00	65,00
2 7/8"	73,03	99,00	95,30	52,50	16,00	68,50
3"	76,20	99,00	98,40	52,50	16,00	68,50

SPECIFICATIONS

- Pmax: 15 bar
- T°C: -40 ~ 200 °C
- Double directional

APPLICATIONS

- Centrifugal pumps
- Submersible pumps
- Water pumps

MATERIALS

- Faces: Q, Carbon, Ceram
- Bellows: NBR, Viton, EPDM
- L-cup: NBR, Viton, EPDM
- Metal parts: st/st 304

REMARKS

- Other dimensions on request

AUGER_{N.V.}

Kemelbeekstraat 30 - 2460 TIELEN - Belgium

T +32 (0)14 86 03 55 E info@auger.be W www.auger.be