


▶ AUGER SEAL TYPE ARB

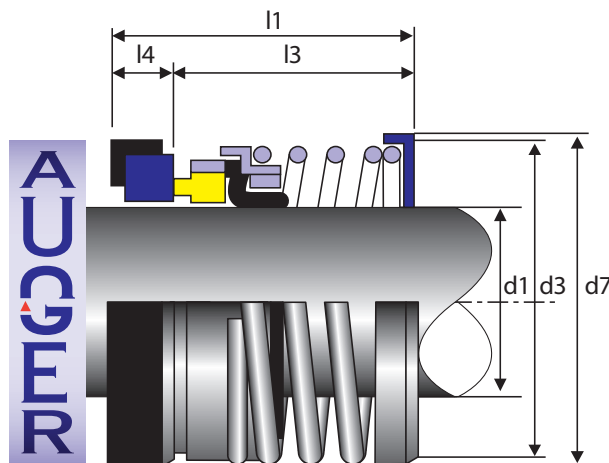

▶ WE SEAL PUMPS!

Dimensions in millimeters

Diameter d1	d3	d7	l3	l4	l1
12	22	23	23,90	8,60	32,50
14	25	25	26,40	8,60	35,00
16	27	27	26,40	8,60	35,00
18	31	33	27,50	10,00	37,50
20	34	35	27,50	10,00	37,50
22	34	37	27,50	10,00	37,50
24	39	39	30,00	10,00	40,00
25	40	40	30,00	10,00	40,00
28	43	43	32,50	10,00	42,50
30	43	45	32,50	10,00	42,50
32	46	48	32,50	10,00	42,50
33	46	48	32,50	10,00	42,50
35	49	50	32,50	10,00	42,50
38	53	56	34,00	11,00	45,00
40	56	58	34,00	11,00	45,00
43	59	61	34,00	11,00	45,00
45	61	63	34,00	11,00	45,00
48	65	66	34,00	11,00	45,00
50	67	70	34,50	13,00	47,50
55	72	75	34,50	13,00	47,50
58	79	78	39,50	13,00	52,50
60	79	80	39,50	13,00	52,50
63	82	83	39,50	13,00	52,50
65	85	85	39,50	13,00	52,50
68	90	90	37,20	15,30	52,50
70	90	92	37,20	15,30	60,00
75	97	97	44,70	15,30	60,00
80	104	105	44,30	15,70	60,00

SPECIFICATIONS

- Pmax: 10 bar
- T°C: -15 ~ 200 °C
- Double directional

APPLICATIONS

- Centrifugal pumps
- Pumps swimming pools
- Water pumps

MATERIALS

- Faces: Q, Carbon, Ceram
- Bellows: NBR, Viton, EPDM
- L-cup: NBR, Viton, EPDM
- Metal parts: st/st 304

REMARKS

- Also available in inch sizes

AUGER_{N.V.}

Kemelbeekstraat 30 - 2460 TIELEN - Belgium

T +32 (0)14 86 03 55 E info@auger.be W www.auger.be