


▶ AUGER PROCES SEAL TYPE AU58

▼ WE SEAL PUMPS!

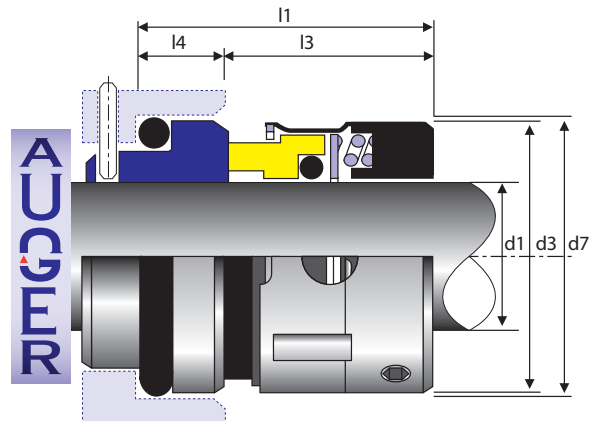

Dimensions in millimeters

Diameter d1	d3	d7	l3	l4	l1
18	32	33	24,00	13,50	37,50
20	34	35	24,00	13,50	37,50
22	36	37	24,00	13,50	37,50
24	38	39	26,70	13,30	40,00
25	39	40	27,00	13,00	40,00
28	42	43	30,00	12,50	42,50
30	44	45	30,50	12,00	42,50
32	46	48	30,50	12,00	42,50
33	47	48	30,50	12,00	42,50
35	49	50	30,50	12,00	42,50
38	54	56	32,00	13,00	45,00
40	56	58	32,00	13,00	45,00
43	59	61	32,00	13,00	45,00
45	61	63	32,00	13,00	45,00
48	64	66	32,00	13,00	45,00
50	66	70	34,00	13,50	47,50
53	69	73	34,00	13,50	47,50
55	71	75	34,00	13,50	47,50
58	78	78	39,00	13,50	52,50
60	80	80	39,00	13,50	52,50
63	83	83	39,00	13,50	52,50
65	85	85	39,00	13,50	52,50
68	88	90	39,00	13,50	52,50
70	90	92	45,50	14,50	60,00
75	95	97	45,50	14,50	60,00
80	104	105	45,00	15,00	60,00
85	109	110	45,00	15,00	60,00
90	114	115	50,00	15,00	65,00
95	119	120	50,00	15,00	65,00
100	124	125	50,00	15,00	65,00

SPECIFICATIONS

- T°C: -20 ~ 200 °C
- V: < 20 m/s
- P: 10 bar
- Unbalanced seal
- Double directional

APPLICATIONS

- Chemical pumps
- Din-pumps
- Mixers
- Spindel pumps

MATERIALS

- Faces rotary: B-carbon, Q1 TC
- Faces stationary Q1, TC
- Metal parts: st/st 304 & 316
- O-rings: Viton a.o

REMARKS

- Also available with: PTFE seal-ring, special builds

AUGER_{N.V.}

Kemelbeekstraat 30 - 2460 TIELEN - Belgium

T +32 (0)14 86 03 55 E info@auger.be W www.auger.be